
NAMUOS

ASSEMBLY & INSTALLATION GUIDE

Wall shelf KILPA


SIZE	MAX LOAD	CARE
50 × 10 cm	5 kg	Wipe with a damp cloth and mild soapy water. Avoid abrasive sponges, solvents, or harsh cleaners

In the box

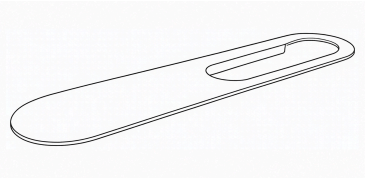

× 1

Wall shelf KILPA



× 3

Screws, wall plugs, screw cups

Assembly

1 Mark the holes

Mark three holes horizontally, spaced 17.2 cm (6.7 inches) apart on the wall with a pencil, using a spirit level to keep them level. You can also hold the shelf in place and mark through its holes.

2 Drill the holes

Drill the holes (6mm diameter and 55 mm deep) straight into the wall at a 90° angle. Insert wall plugs (6 x 50 mm) into the holes. **PLEASE NOTE.** Soft or crumbly walls (plasterboard, old plaster, aerated concrete): drill with a 5.5 mm bit, without hammer mode, to keep the hole from getting too wide.

3 Mount the shelf

Place the screw caps on the screws. Hold the shelf against the wall and insert the screws (3,5 x 50 mm).

Thank you for choosing NAMUOS

www.namuos.com · info@namuos.lt